




MATRIX® THE COMPLETE TURF PROTECTION / PRESERVATION SYSTEM



GRAY & TRANSLUCENT MATS – CAN SUPPORT HEAVY EQUIPMENT & PROVIDE NATURAL TURF PROTECTION

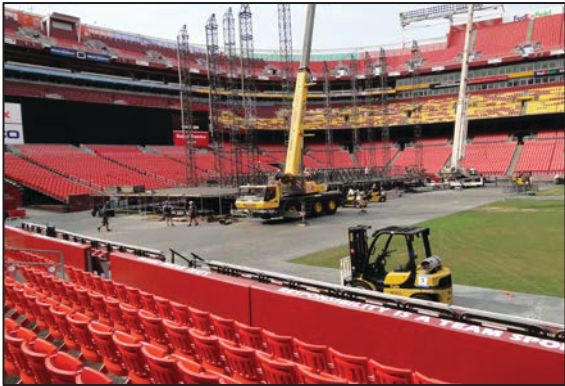

TRANSLUCENT MATS- KEEPS TURF ALIVE UNDER STAGES AND WHERE NATURAL LIGHT IS LIMITED



EASY TO INSTALL AND REMOVE



4010 Concession 7,
Puslinch, ON N0B 2J0
www.gallogroundsupport.com

Joseph Gallo
Phone: 519-766-0008
Fax: 519-766-0009
Email: joseph@gallogroundsupport.com

Joseph Gallo Jr.
Phone: 519-766-0008
Fax: 519-766-0009
Email: jjgallo@gallogroundsupport.com



Matrax Mat Specifications

<i>SPECIFICATION</i>	<i>STANDARD</i>	<i>METRIC</i>
Net Working Surface	13.5 ft ²	1.25 m ²
Weight Per Mat	47.5 lbs.	21.5 kg
Surface Dimensions	4 x 4 ft.	1.22 m x 1.22 m
Height	1.5"	38.1 mm
Net Working Surface Per Truck Based on GVWR rating of 80,000 lbs.	12,960 ft ²	1,393.5 m ²
Shipping & Storage Max pallet height not to exceed 42 inches	24 mats/ 4'x4' pallet 48 mats/ 4'x8' pallet	N/A
Compression Strength Based on an intermittent load on a 12" x 12" area	450 psi	3,100 kpa
Maximum Wheel Load Rubber tire @ <5mph with a minimum contact area of 9 square inches over level surface @ 72 F	300 psi	2,068 kps
Minimum Contact Area For Static Loads >250 pounds @ 72 degrees F	16 in ²	10.16 cm ²
Maximum Allowable Deflection	3"	7.62 cm
Temperature Range	-4°F – 113°F	-20°C – 4°C
Burn Rating Data is based on the materials used in manufacturing	UL 94-HB	N/A
Colors	Translucent & Gray	Translucent & Gray
Surface Texture	Diamond Pattern – ADA Compliant	Diamond Pattern – ADA Compliant

Benefits

- ✓ **Injection Molded High Density Polyethylene Plastic**
- ✓ **One Mat – Multiple Applications**
- ✓ **Easy to Install – Built-in Cam Lock System**
- ✓ **Pedestrian Friendly**
- ✓ **Supports Vehicular Traffic**
- ✓ **100% Recyclable**
- ✓ **Made In USA**



4010 Concession 7,
Puslinch, ON N0B 2J0
www.gallogroundsupport.com